


1 The Halifax bismat bracket

Can be used for vertical and horizontal operations for pipe sizes 50mm - 200mm dia. Supplied Zinc plated and rubber lined only.

This patented bracket features:

- Unique automatic locking system
- Captivated combi slot locking screw
- M8/M10 tapped bosses on 50mm-100mm dia
- M10 tapped boss on 150mm-200mm dia
- Ageing resistant EPDM rubber lining

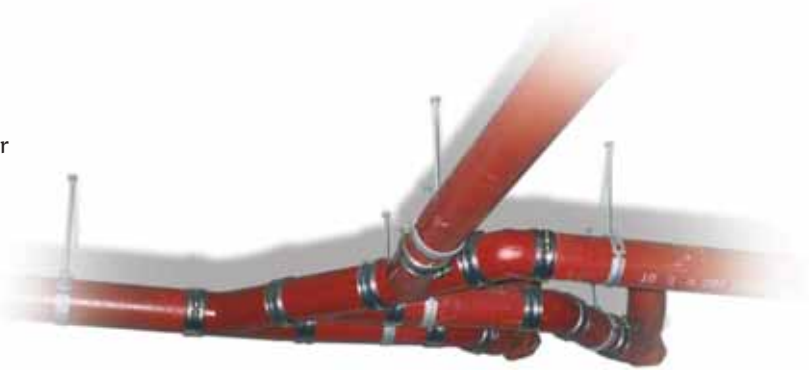

2 The Halifax heavy duty bossed bracket

Available in a Zinc plated finish unlined as standard for pipe sizes 50mm-300mm dia. Also available rubber lined.

This bracket features:

- 2 No M8 locking screws on sizes 50mm - 100mm
- 2 No M10 locking screws on sizes 150mm - 200mm
- 2 No M12 locking screws on sizes 250mm - 300mm
- M8/10 tapped boss on size 50mm
- M10/12 tapped boss on sizes 70mm-200mm
- M16 tapped boss on sizes 250mm-300mm
- Can be fixed both horizontal and vertical



3 The Halifax galvanized steel pipe clamp

Two part clamp: one side hinged, the other side with locking screw. For pipe sizes 50mm - 300mm dia

This clamp features:

- Especially developed for cast iron drainage pipe
- Hinged
- Hot dipped galv
- Resistance welded connecting nut M10 on sizes 50mm-200mm
- 12.5mm hole for 12mm threaded rod on sizes 250mm-300mm
- Can be fixed both vertical or horizontal

4 The Halifax split band clip

Two part band: zinc plated as standard supplied with locking nuts and bolts for pipe sizes 50mm - 300mm dia

This bracket features:

- Zinc plated as standard
- Can be fixed both vertical or horizontal
- Supplied completed with nuts and bolts

1 Halifax grip

Universal safety connection ring to be fixed around the Max or Connect coupling:

- High tensile strength
- For pipe use up to 3 bar pressure
- Improves the axial load of a high pressure drain
- Made of zinc plated steel 1.0332
- Up to DN100: 2 clamp parts and 4 hexagon head screws with retaining washer
- From DN150: 3 clamp parts and 6 hexagon head screws with anti loss washer
- Hexagon head screws DIN EN 24017 (DIN 933) zinc plated
- CO2 welded nuts
- Clamp parts packed separately with pre-assembled screws

2 Halifax high performance coupling

Fully re-usable axial restraint pipe coupling system for use in high risk areas e.g. computer rooms etc:

- WRAS approved
- 6 Bar pressure
- Casing 304 stainless steel, no spot welding
- 2 locking screws on all sizes, alloy steel zinc, PTFE coated
- EPDM gasket with stainless steel anchor teeth

